


KALYKE - DUAL FUNCTION GENERATOR

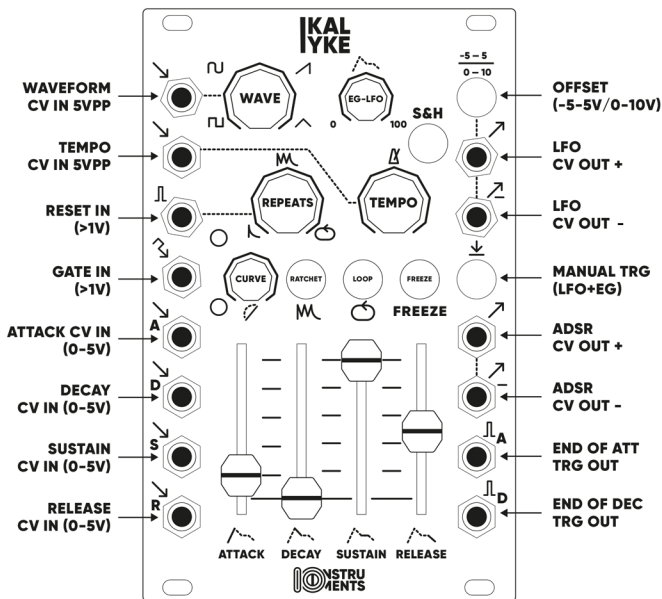

Wave: Pw (20-50-90%) - Sinus (720°) - Ramp (720°) - Triangle (680°), CV controlled, Sample and Hold (alternative with Switch)

Eg-Lfo: Attenuator for ADSR takes effect to LFO Amplitude

Repeats: After Reset 1-14 repeats and endless LOOP

Tempo: Center 4Hz +/- 8 Oktaves, CV Controlled

Curve: Continuous Exponentiell to Linear response

Ratchets: 16 different multirepeats of Attack

Loop: Envelope LOOP mode from Attack to Release

Freeze: All settings get freedzed to keep exact positions

Output Amplitude: **7,5V** (ADSR) **10VPP** (LFO)

Frequency Range: LFO **70s - 1100Hz**

ADSR **0,4ms-10s** (Att) **0,8ms-20s** (Dec/Rel)

TRG OUT: **2ms/10V**

Power Consumption: **+V rail: +120 mA**

-V rail: -105 mA

Module Width: **16 HP**

Depth: **25mm**

More information at:
www.io-instruments.de

